




Section B-B
FIG. 1B

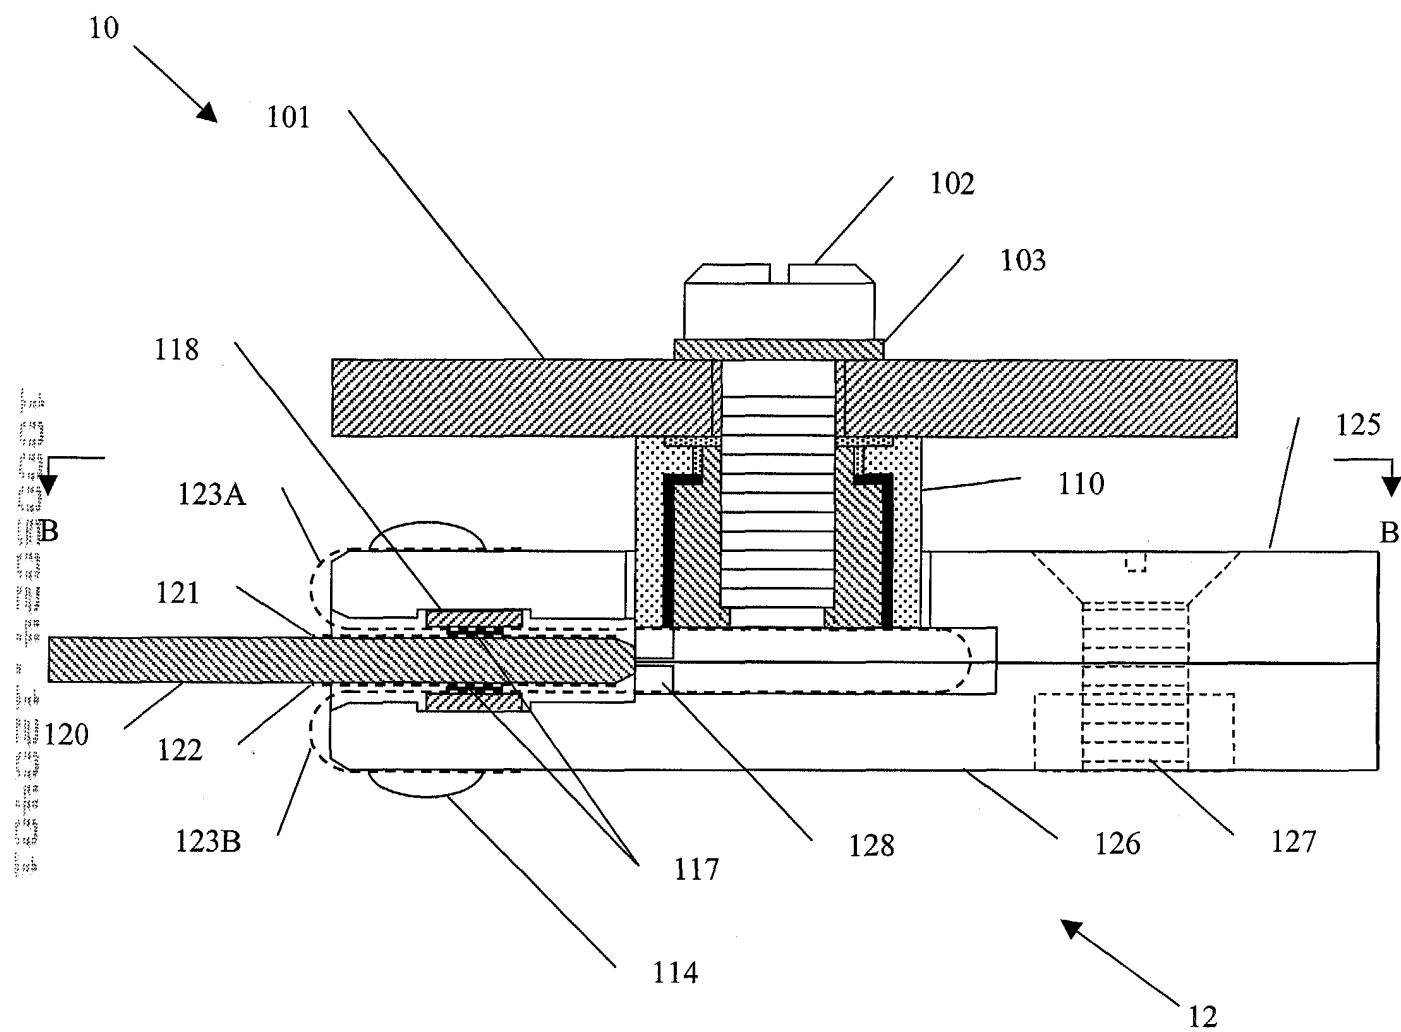


Section A-A
FIG. 2A

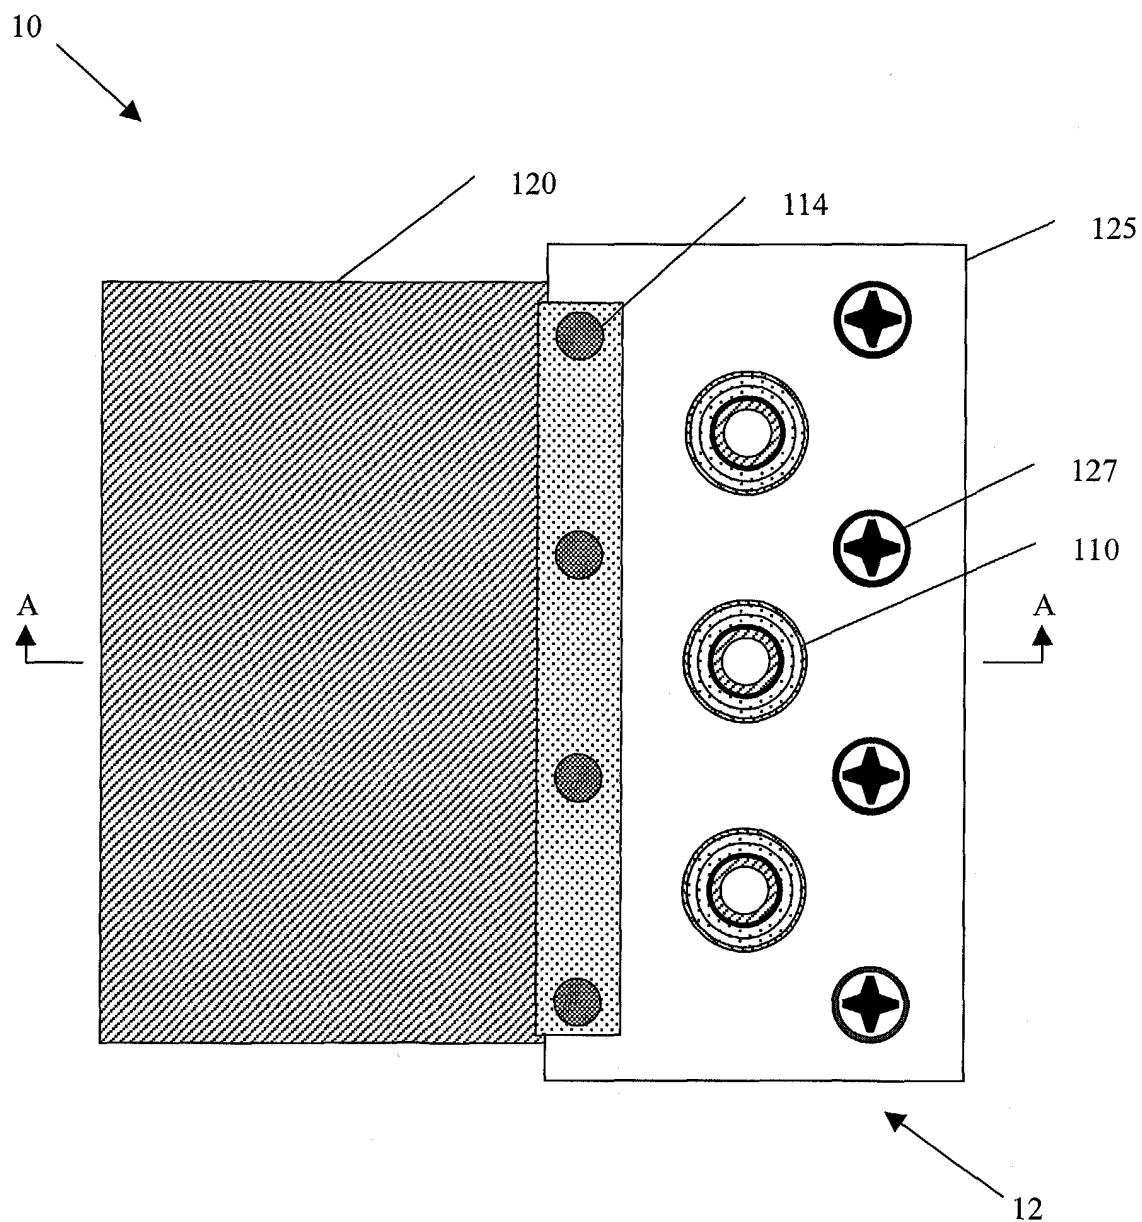

Section B-B
FIG. 2B

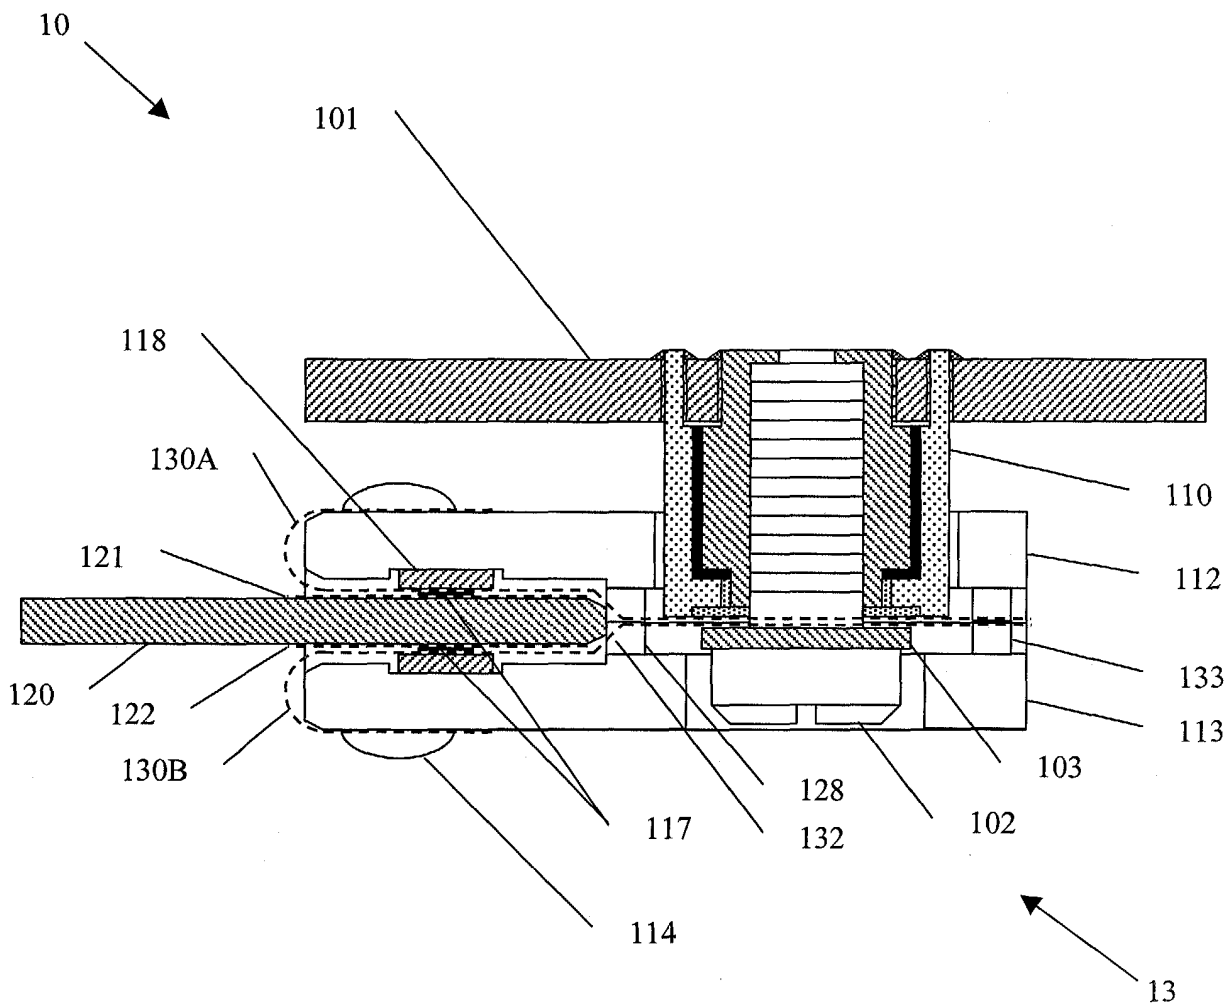

Section A-A
FIG. 3

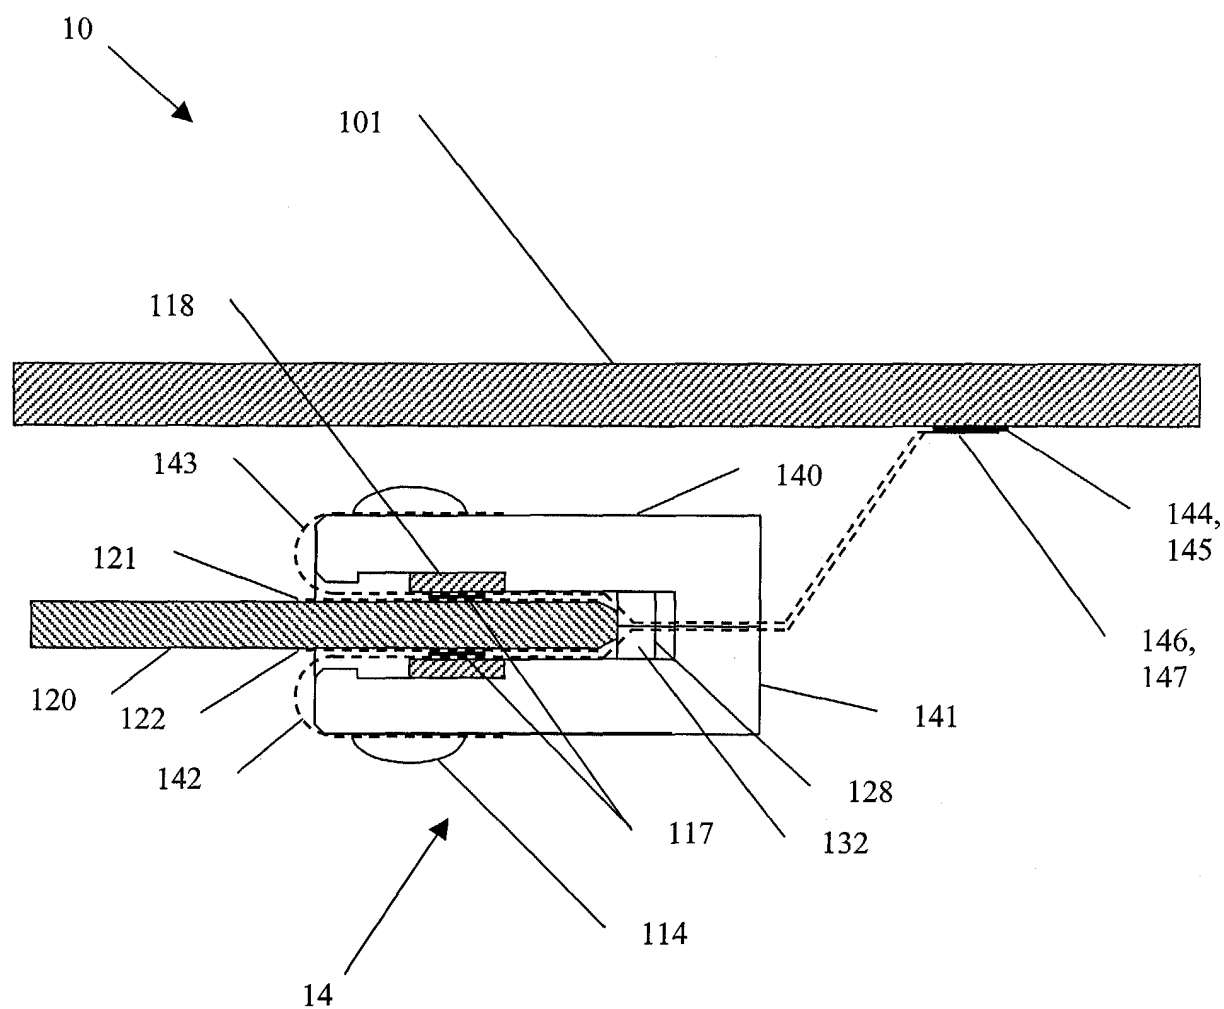

Section A-A
FIG. 4A

10

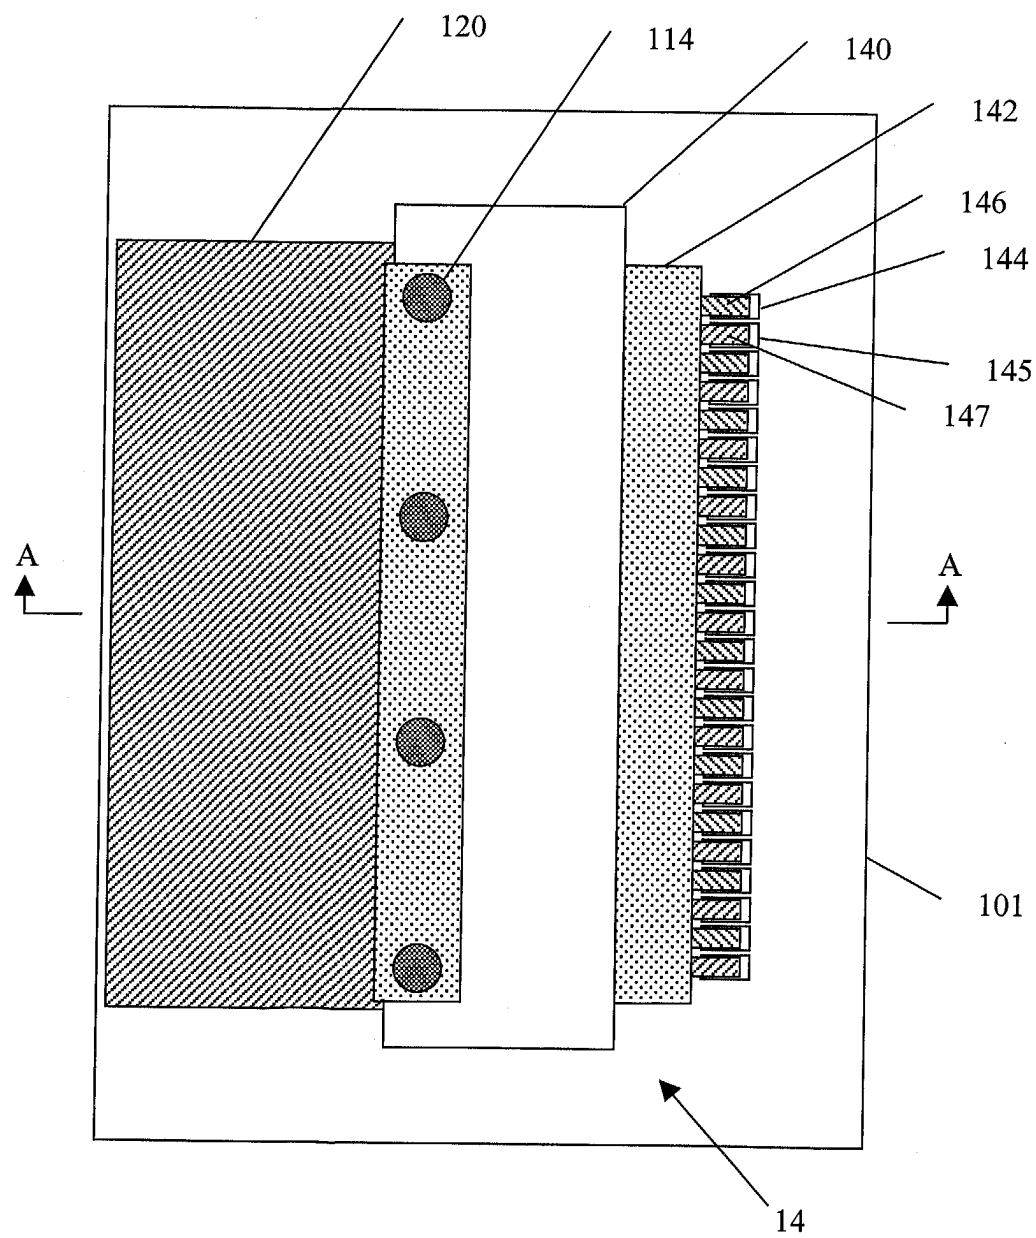


FIG. 4B

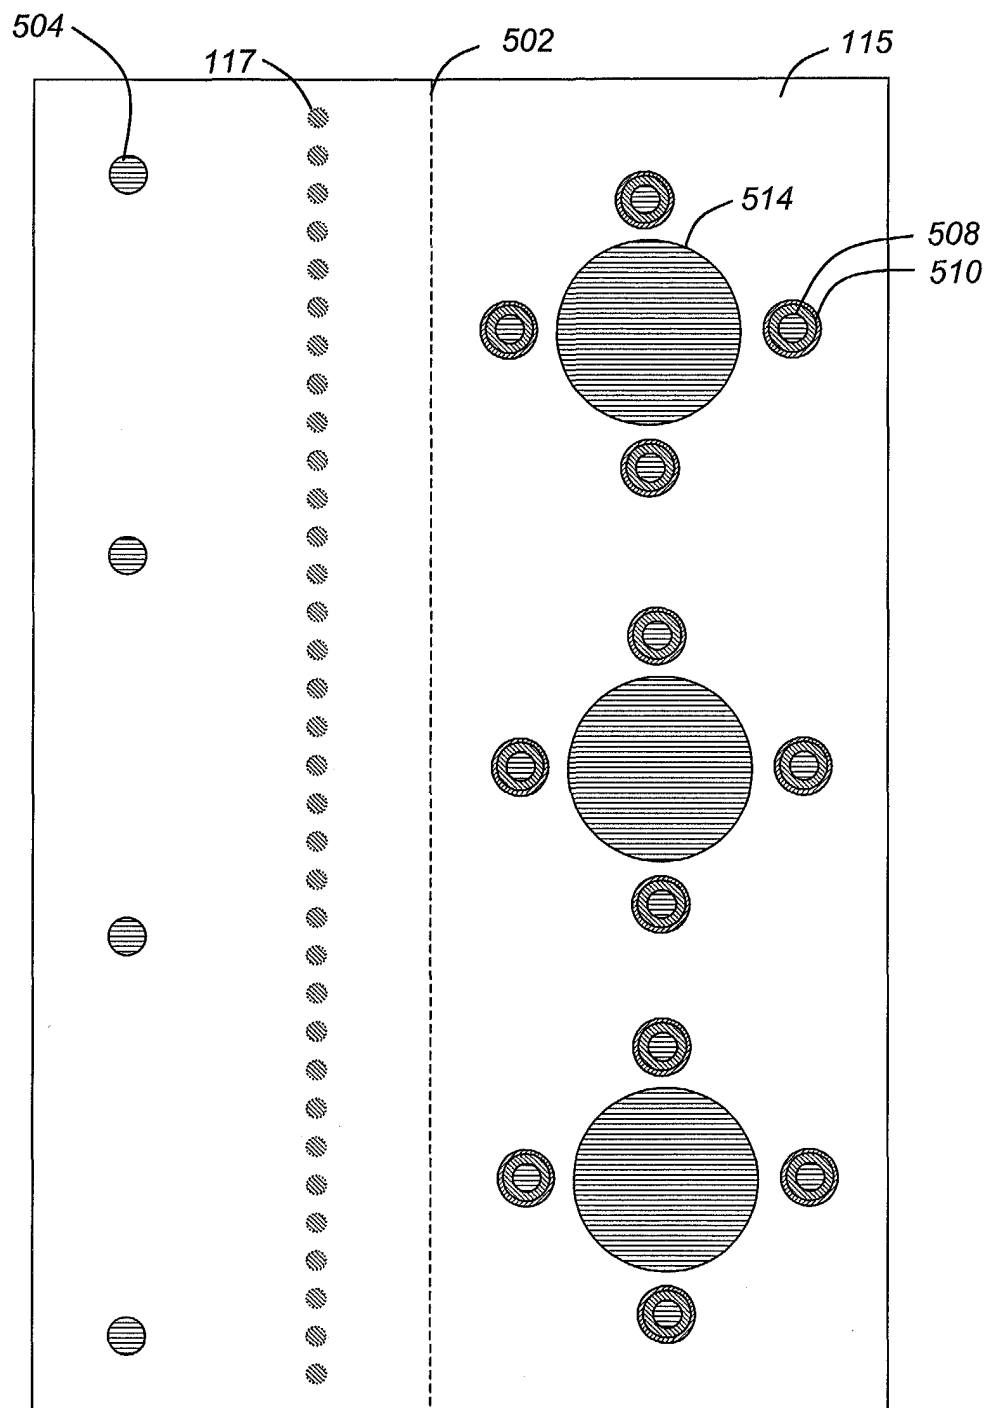


FIG. 5A

FIG. 5B is a schematic diagram of a device 100 in a second state. The device 100 is shown in a perspective view, and the dashed line 116 indicates a fold line. The device 100 includes a first side 117 and a second side 116. The first side 117 includes a series of small circular features 504. The second side 116 includes a series of larger circular features 508, each of which is surrounded by a ring of smaller circular features 514. The larger circular features 508 are also surrounded by a ring of smaller circular features 518. The device 100 is shown in a perspective view, and the dashed line 116 indicates a fold line.

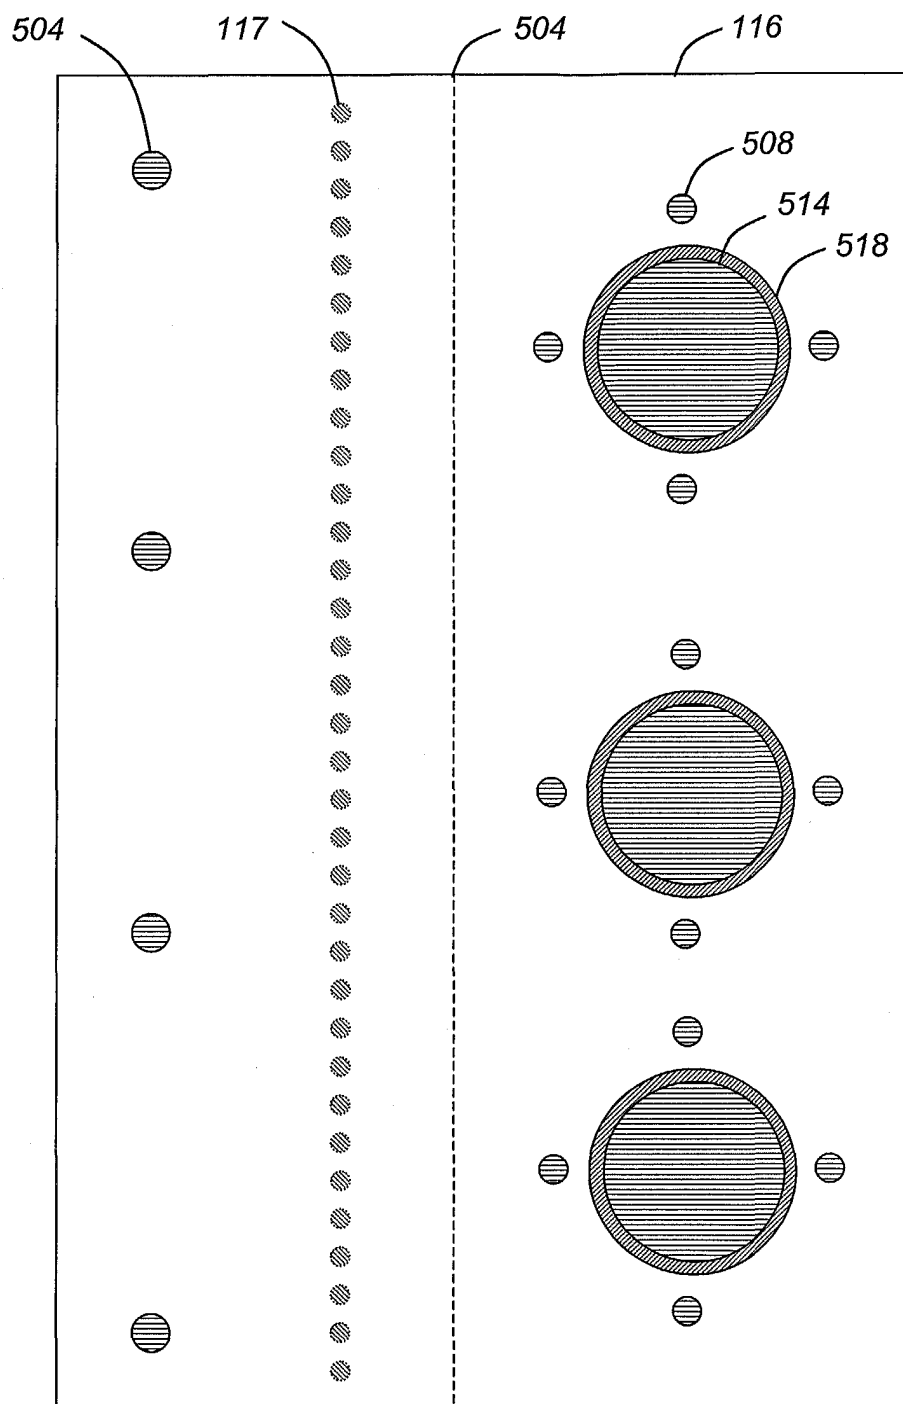


FIG. 5B